



1219 4th Avenue South  
Nashville, TN 37210


**Phone:** (615) 254-3561  
**Fax:** (615) 255-7673  
**Email:** sales@richeycap.com  
**Web:** richeycap.com

# RLC222M050V1635B

Aluminum Electrolytic Capacitors

Miniature Type  
RLC Series

Richey P/N: RLC222M050V1635B

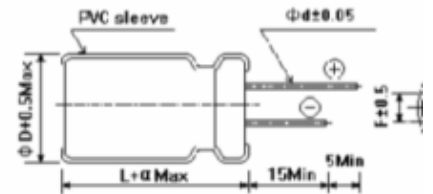

## Specifications:

Dimensions:

Case Size D x L (mm): 16 x 35.5

Operating Temperature Range: -40-85 °C & -25-85 °C

Rated Voltage: 50 VDC

Surge Voltage: 63 VDC

Capacitance ( $\mu\text{F}$ ): 2200

Leakage Current: 1110

Rated Ripple Current: 2340 mA rms @ +85°C, 120Hz

Max ESR (m $\Omega$ ): 0.07 @ +20°C, 120Hz

Load Life:

2000

Capacitance Change: Within +/- 20% of the initial measured value.

Dissipation Factor ( $\tan\delta$ ): Not more than 200% of the initial specified value

Leakage Current: Not more than initial specified value

\*ROHS Compliant