



1219 4th Avenue South  
Nashville, TN 37210


**Phone:** (615) 254-3561  
**Fax:** (615) 255-7673  
**Email:** sales@richeycap.com  
**Web:** richeycap.com

# RLL33RM025V0611B

Aluminum Electrolytic Capacitors

Miniature Type  
RLL Series

Richey P/N: RLL33RM025V0611B

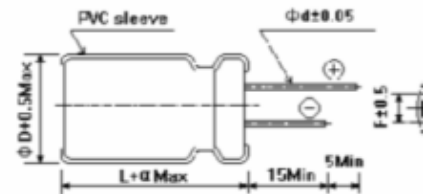

## Specifications:

Dimensions:

Case Size D x L (mm): 6.3 x 11.5

Operating Temperature Range: -40-85 °C

Rated Voltage: 25 VDC

Surge Voltage: 32 VDC

Capacitance ( $\mu\text{F}$ ): 33

Leakage Current: 6.6

Rated Ripple Current: 140 mA rms @ +85°C, 120Hz

Max ESR (m $\Omega$ ): 3.22 @ +20°C, 120Hz

Load Life:

2000

Capacitance Change: Within +/- 15% of the initial measured value.

Dissipation Factor ( $\tan\delta$ ): Not more than 150% of the initial specified value

Leakage Current: Not more than initial specified value

\*ROHS Compliant