



1219 4th Avenue South  
Nashville, TN 37210


**Phone:** (615) 254-3561  
**Fax:** (615) 255-7673  
**Email:** sales@richeycap.com  
**Web:** richeycap.com

# RLL3R3M050V0511B

Aluminum Electrolytic Capacitors

Miniature Type  
RLL Series

Richey P/N: RLL3R3M050V0511B

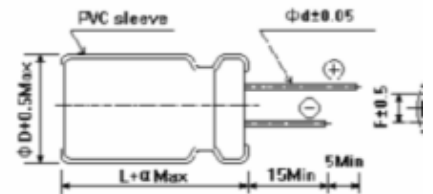

## Specifications:

Dimensions:

Case Size D x L (mm): 5 x 11.5

Operating Temperature Range: -40-85 °C

Rated Voltage: 50 VDC

Surge Voltage: 63 VDC

Capacitance ( $\mu\text{F}$ ): 3.3

Leakage Current: 1.32

Rated Ripple Current: 40 mA rms @ +85°C, 120Hz

Max ESR (m $\Omega$ ): 32.17 @ +20°C, 120Hz

Load Life:

2000

Capacitance Change: Within +/- 15% of the initial measured value.

Dissipation Factor ( $\tan\delta$ ): Not more than 150% of the initial specified value

Leakage Current: Not more than initial specified value

\*ROHS Compliant