



1219 4th Avenue South
Nashville, TN 37210


Phone: (615) 254-3561
Fax: (615) 255-7673
Email: sales@richeycap.com
Web: richeycap.com

RPK82RM500V1840B

Aluminum Electrolytic Capacitors

Miniature Type
RPK Series

Richey P/N: RPK82RM500V1840B

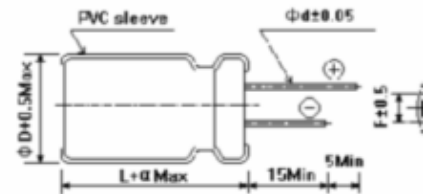

Specifications:

Dimensions:

Case Size D x L (mm): 18 x 40

Operating Temperature Range: -25-105 °C & -25-105 °C

Rated Voltage: 500 VDC

Surge Voltage: 550 VDC

Capacitance (μF): 82

Leakage Current: 2500

Rated Ripple Current: 590 mA rms @ +105°C, 120Hz

Typical ESR (m Ω): 1.3 @ +20°C, 120Hz

Max ESR (m Ω): 3.2 @ +20°C, 120Hz

Load Life:

Case Size	6.3	8	10	≥ 12.5
-----------	-----	---	----	-------------

Hours	2000	3000	4000	5000
-------	------	------	------	------

Capacitance Change: Within +/- 20% of the initial measured value.

Dissipation Factor ($\tan\delta$): Not more than 300% of the initial specified value

Leakage Current: Not more than initial specified value

*ROHS Compliant