
1219 4th Avenue South
Nashville, TN 37210

Phone: (615) 254-3561
Fax: (615) 255-7673
Email: sales@richeycap.com
Web: richeycap.com

RTD472M200V4090B

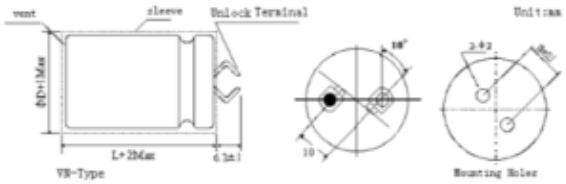

Aluminum Electrolytic Capacitors

Snap-In Type
RTD Series

Richey P/N: RTD472M200V4090B

Specifications:

Dimensions:

Case Size D x L (mm): 40 x 90

Operating Temperature Range: -40-85 ºC & -25-85 ºC

Rated Voltage: 200 VDC

Surge Voltage: 250 VDC

Capacitance (µF): 4700

Leakage Current: 9400

Rated Ripple Current: 9.2 A rms @ +85°C, 120Hz

Typical ESR (mΩ): 30 @ +20°C, 120Hz

Max ESR (mΩ): 42 @ +20°C, 120Hz

Load Life:

5000
Capacitance Change: Within +/- 20% of the initial measured value.
Dissipation Factor (tanδ): Not more than 200% of the initial specified value
Leakage Current: Not more than initial specified value

*ROHS Compliant